

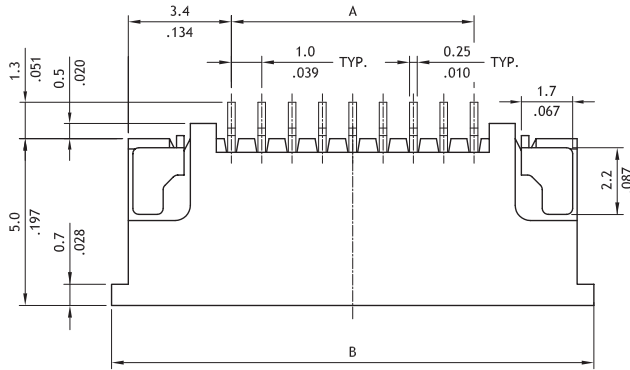
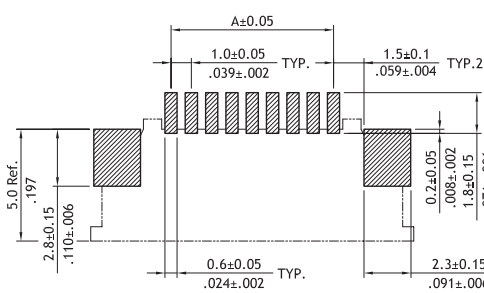
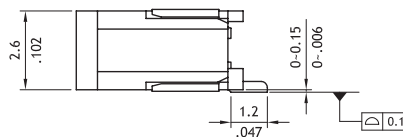


**PA03 Series 1.00mm(.039") SMT LIF FFC/FPC Connectors**


- ⊙ Tin plated Phosphor Bronze Dual contacts
- ⊙ Insulation: Glass filled Nylon 6T UL 94V-0, Color Brown
- ⊙ Low insertion force
- ⊙ Fully checked by CCD and Hi-Pot test
- ⊙ With fixed metal tabs to secure connector in place
- ⊙ Available in Tube or Reel packing
- ⊙ Engineering No's: CF08 Series

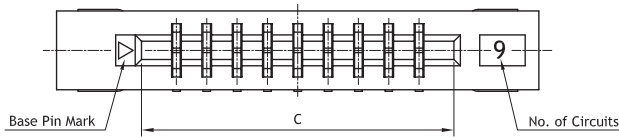


A = 1.00 \* No. of Spaces  
 B = A + 8.0  
 C = A + 2.3  
 \* Available in 4 through 32 circuits



Solder Pad Pattern



Accommodated FFC

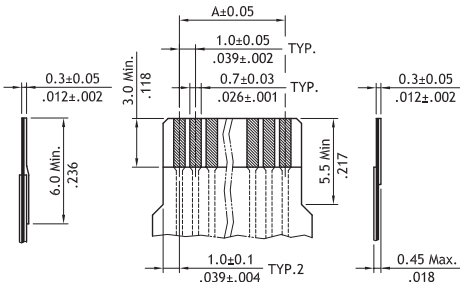

Accommodated FPC

**Ordering Code**

**1 PA03 32 1 H 2 R 0**

- ❶ Series No.
- ❷ Circuits : 06 to 32
- ❸ Plating code:  
1= Tin over Nickel



- ❹ Contact style:  
H= Side entry
- ❺ Color: 2= Brown

- ❻ Packing options:  
R= Tape & Reel  
T= Tube Packing
- ❼ Other options:  
0= Standard  
\* Special options Consult factory


"Your Connection"

# PA02/PA03 Series Tape & Reel Packing

- ⊙ Reel Material: HIPS
- ⊙ Carrier Material: Black Conductive Polystyrene Alloy
- ⊙ Cover Tape Material: Polyester
- ⊙ Cover Tape Reel Strength: 0.1N~1.3N
- ⊙ Carrier camber is within 1mm in 100mm
- ⊙ All dimensions meet EIA-481-2 & EIA-481-3 requirements
- ⊙ Quantity: 2,000 PCS/Reel
- ⊙ Engineering No's: CF07/CF08 Series

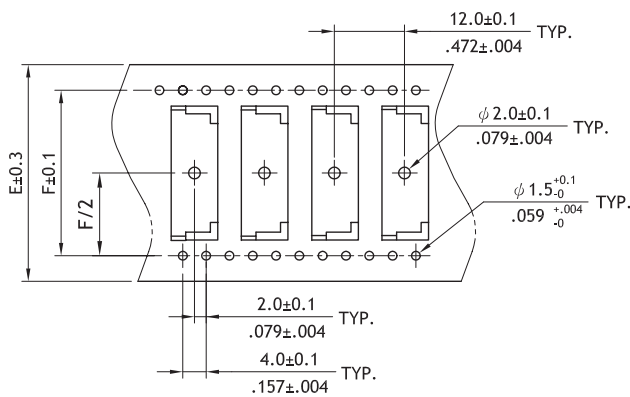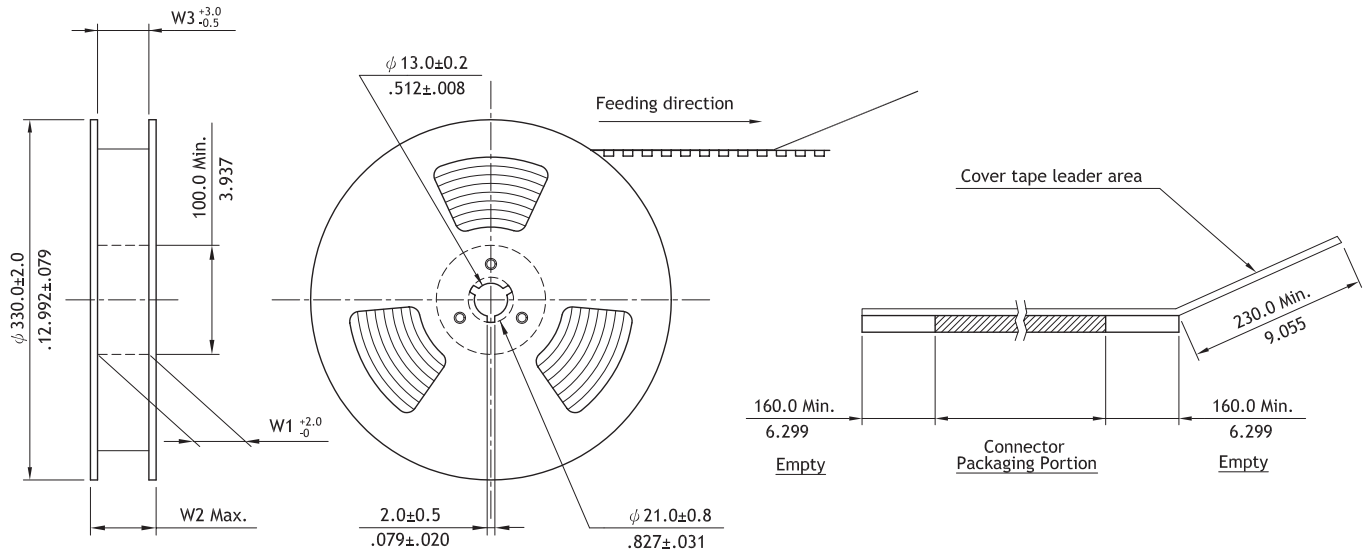

WIDTH : 32,44,56 mm Carrier

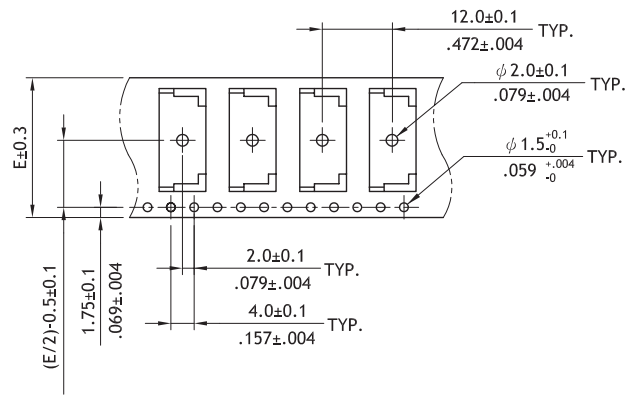

WIDTH : 24 mm Carrier

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4-9	24.0(.945)	-	24.4(.961)	30.4(1.197)	24.4(.961)	10
10-15	32.0(1.260)	28.40(1.118)	32.4(1.276)	38.4(1.512)	32.4(1.276)	8
16-26	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)	6
27-32	56.0(2.205)	52.40(2.063)	56.4(2.220)	62.4(2.457)	56.4(2.220)	5