

1.25±0.05

1ST Circuit Position

2.2

1.75

4.0

A-A SEC.

5.2 2.047

## PA08 Series 1.25mm(.049") FFC/FPC Connectors

- Standard with Tube packing
- Tin plated contacts with kinked tail
- O Insulation: Glass filled polyester UL 94V-0, Color Black
- O Accommodates 0.3mm FFC/FPC thickness

1.25

- TYP

HHHH

0.5 .020 TYP

(Solder tail pitch)

1.25

.049

.098

A

© Engineering No's: CF12 Series

Â В

6.8 268

3.2

1ST Circuit Position





2.50±0.05 .098±.002 TYP.


ф





Prolex

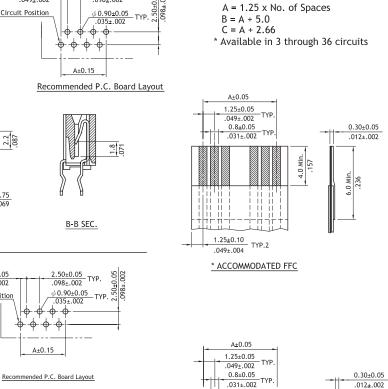













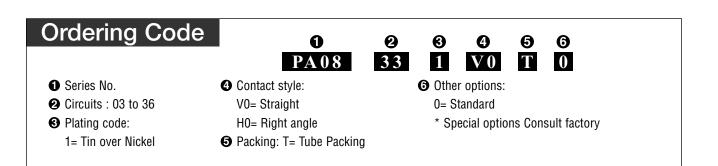

P ľ 0 | e X