

PB02 Series 2.00mm(.079") Board In Connector

- Low profile latch housing
- Compatible with PB02 crimp board in terminal
- Straight terminal accommodates AWG #24 ~ #30
- Right angle terminal accommodates AWG #24 ~ #28


Construction

- Insulator: Nylon 66 UL 94V-0, Color Natural
- Terminal: Tin plated Phosphor Bronze
- Engineering No's: CI02/2012 Series




RU RU:E159616

P/N PB02**S0000

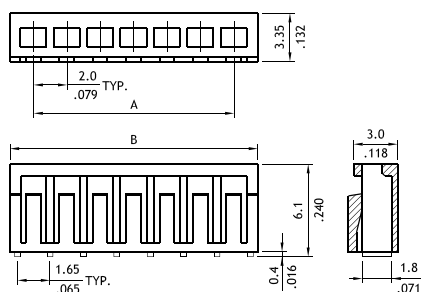


P/N PB02**S000H

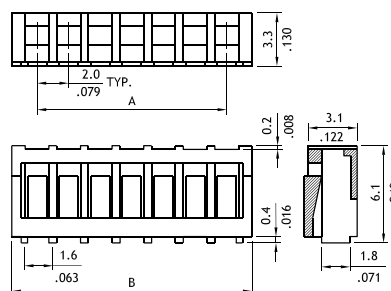


Circuits	Dimension	
	A	B
2	2.0(.079)	5.2(.205)
3	4.0(.157)	7.2(.283)
4	6.0(.236)	9.2(.362)
5	8.0(.315)	11.2(.441)
6	10.0(.394)	13.2(.520)
7	12.0(.472)	15.2(.598)
8	14.0(.551)	17.2(.677)
9	16.0(.630)	19.2(.756)
10	18.0(.709)	21.2(.835)
11	20.0(.787)	23.2(.913)
12	22.0(.866)	25.2(.992)
13	24.0(.945)	27.2(1.071)
14	26.0(1.024)	29.2(1.150)
15	28.0(1.102)	31.2(1.228)
16	30.0(1.181)	33.2(1.307)

P/N PB02T011PEO

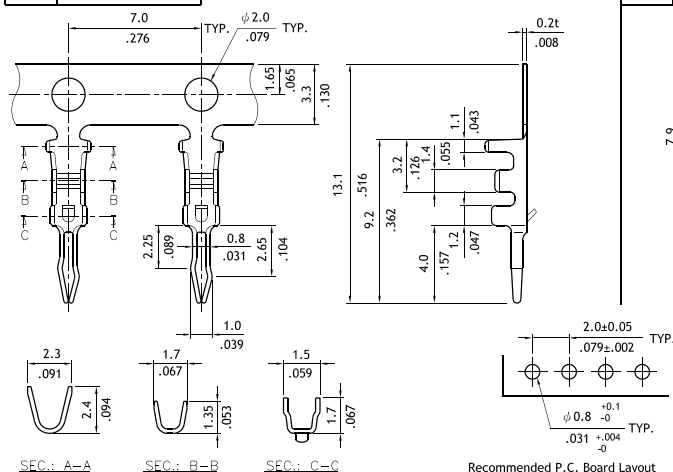

P/N PB02T011PEH

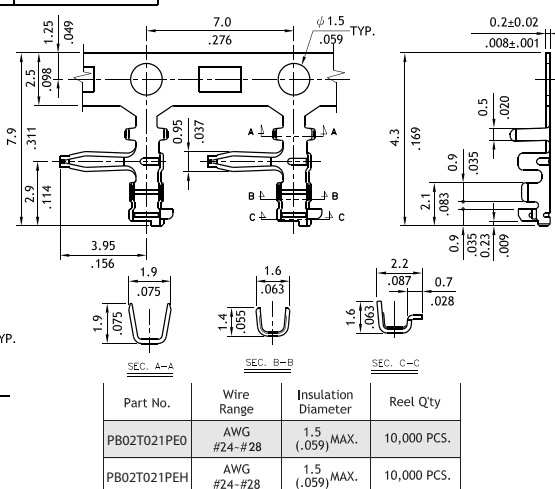

Ordering Code

1 PB02 **2** 16 **3** S **4** 0000

- Series No.
- No. of Circuits: 02 to 16
- S= Connector housing
- Housing style:
0000= For straight terminal
000H= For right angle terminal
* Special options Consult factory

1 PB02 **2** T02 **3** 1 **4** P **5** E **6** 0

- Series No.
- Type: T02= AWG #24 ~ #28
- Plating : 1= Tin over Nickel plated
- Material:
P= Phosphor Bronze
- Plating method : E= Pre-tinned
- Terminal style:
O= Straight
H= Right angle