


PB08 Series 2.50mm(.098") Wire to Board Connector



- Low profile with locking ribs
- Mates with PB08 header
- Compatible with PB08 crimp clip terminal
- Terminal accommodates AWG #22 ~ #28

Construction





- Insulator: Nylon 66 UL 94V-2, Color Ivory
- Terminal: Tin plated Brass or Phosphor Bronze
- Engineering No's: CI25/2508 Series



AL AL:E159616

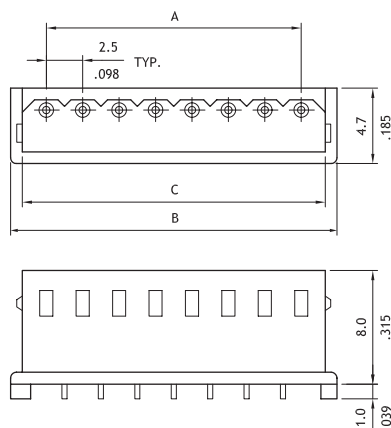

Circuits	Dimension		
	A	B	C
2	2.5(.098)	7.4(.291)	5.9(.232)
3	5.0(.197)	9.9(.390)	8.4(.331)
4	7.5(.295)	12.4(.488)	10.9(.429)
5	10.0(.394)	14.9(.587)	13.4(.528)
6	12.5(.492)	17.4(.685)	15.9(.626)
7	15.0(.591)	19.9(.783)	18.4(.724)
8	17.5(.689)	22.4(.882)	20.9(.823)
9	20.0(.787)	24.9(.980)	23.4(.921)
10	22.5(.886)	27.4(1.079)	25.9(1.020)
11	25.0(.984)	29.9(1.177)	28.4(1.118)
12	27.5(1.083)	32.4(1.276)	30.9(1.217)
13	30.0(1.181)	34.9(1.374)	33.4(1.315)
14	32.5(1.280)	37.4(1.472)	35.9(1.413)
15	35.0(1.378)	39.9(1.571)	38.4(1.512)

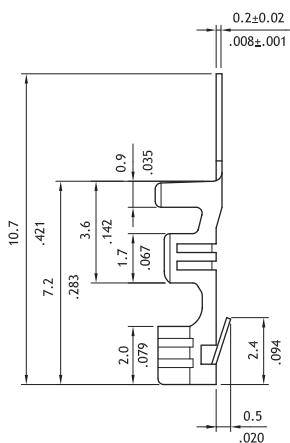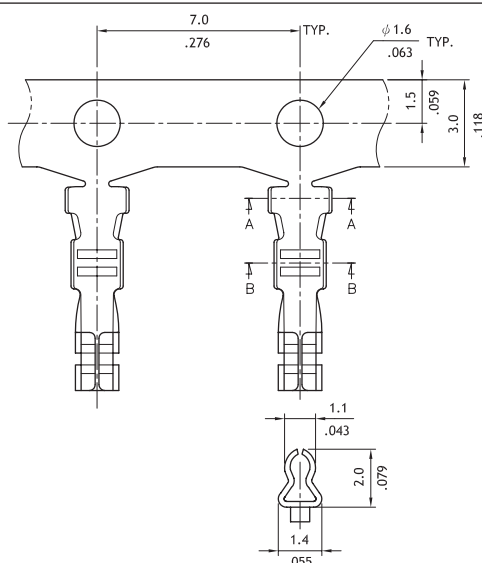

Part No.	Wire Range	Insulation Diameter	Reel Qty
PB08T021*E0	AWG #22-#28	1.9 (.075) MAX.	10,000 PCS.

Ordering Code

1 **PB08** **2** **15** **3** **S** **4** **0000**

- 1 Series No.
- 2 No. of Circuits: 02 to 15
- 3 S= Connector housing
- 4 Other options:
0000= Standard

* Special options Consult factory

1 **PB08** **2** **T02** **3** **1** **4** **P** **5** **E** **6** **0**

- 1 Series No.
- 2 Type: T02= AWG #22 ~ #28
- 3 Plating : 1= Tin over Nickel plated
* Optional plating available but MOQ requested
- 4 Material: P= Phosphor Bronze
B= Brass
- 5 Plating method : E= Pre-tinned
- 6 Other options: 0= Standard